




# TCC454MP-9342

4 MP Network Box Camera


## 4 MP Network Box Camera

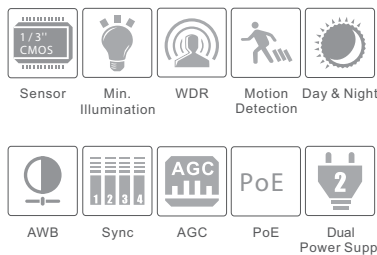

## Features

- 4MP (2592 × 1520) H.265 full real time coding
- Max.resolution: 2592 × 1520
- ICR auto switch, true day / night
- 3D DNR, physical WDR
- Support HLC, BLC and defogging
- ROI coding
- Support SD card local storage, up to 128GB
- Support CVBS video output and two-way audio
- Support hardware reset
- Support PoE power supply, AC 24V optional
- Support smart phone, iPad, remote monitoring
- Support P2P
- Support three streams

## Dimensions

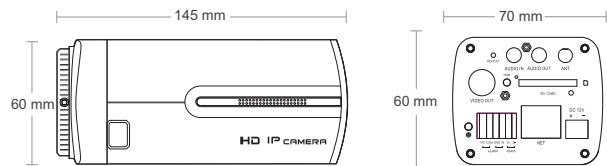

## Available Accessories



## Specifications

Specifications	Model	TCC454MP-9342
<b>Camera</b>		
Image Sensor		1 / 3 "CMOS
Image Size		2688 x 1520
Electronic Shutter		1 / 25 s ~ 1 / 100000 s
Auto Iris		DC drive
Min. Illumination		Color : 0.05 lux @F1.2, AGC ON; B / W : 0.01 lux @F1.2, AGC ON
Lens		Non-standard
Lens Mount		C / CS
Day & Night		ICR
Wide Dynamic Range		120dB
BLC		Yes
HLC		Yes
Defogging		Yes
Digital NR		2D / 3D DNR
<b>Image</b>		
Video Compression		H.265 / H.264 / MJPEG
H.265 Compression Standard		Main Profile @Leve4.1 High Tier
Resolution		4MP (2592 × 1520), 2K (2560 × 1440), 3MP (2304 × 1296), 1080P (1920 × 1080), 720P (1280 × 720), D1, CIF, 480 × 240
Main Stream		60Hz : 4MP (1~30fps) / 2K (1~30fps) / 3MP (1~30fps) / 1080P (1~30fps) / 720P (1~30fps) 50Hz : 4MP (1~25fps) / 2K (1~25fps) / 3MP (1~25fps) / 1080P (1~25fps) / 720P (1~25fps)
Bit Rate		64Kbps ~ 10Mbps
Encode Mode		VBR / CBR
Quality		Five levels under VBR; Freely adjustable under CBR
Image Settings		ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc. adjustable through client software or web browser
Audio Compression		G.711A / U
ROI		Each ROI to be configured separately
<b>Interfaces</b>		
Network		RJ45
Audio		MIC IN × 1, MIC OUT × 1
Video Output		CVBS video output (BNCx1)
Storage Card		Support SD card, up to 128GB
RS485		Yes
Alarm Input		1 CH
Alarm Output		1 CH
<b>Functions</b>		
Remote Monitoring		IE browsing, CMS remote control
Online Connection		Support simultaneous monitoring for up to 10 users; Support multi-stream real time transmission
Network Protocol		TCP / IP, UDP, DHCP, UPnP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP
Interface Protocol		ONVIF, GB-T / 28181-2011
Storage		SD card local storage, network remote storage
Smart Alarm		Motion alarm, sensor alarm
PTZ		RS485 x 1
PoE		Yes
<b>Others</b>		
Power Supply		DC12V / PoE
AC Input		AC 24V optional
Power Consumption		< 2.5W
Operating Environment		- 20 °C ~ 50 °C, 10 % ~ 90 % humidity
Dimensions ( mm )		70 × 145 × 60 ( W × D × H )
Weight ( net )		400g
Installation		Wall mounting